


Description

KCC Surface Slimline Double Magnet, 600lbs Leaf Holding Force

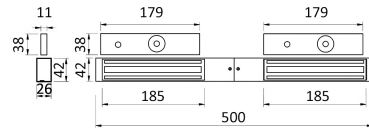

Technical Features

Function & Operation	Electromagnetic lock
Summary of Features	Holding force of up to 600lbs (272kg) per leaf, site selectable 12 or 24v DC, status LED lights, aluminium housing, current draw 500mA @ 12vDC & 250mA @ 24vDC. Operating temperature -10 to 55 degrees C

Options	Monitored (M) or Magnetic Bond Sensor (MBS)
---------	---

Dimensions

Dimensions	Magnet: L500 x W42 x D26, Armature Plate x 2: L179 x W38 x D11
------------	--

Finishes

Finishes Available	Brushed Aluminium
--------------------	-------------------

Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	EN1634 Fire Assessed Report 400128

BIM Assist™

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

23/09/2016

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2020.


Description

KCC Surface Slimline Double Magnet, 600lbs Leaf Holding Force

Specification Text

GENERAL ACCESS CONTROL

- Manufacturer: KCC Group
- Product reference: KEM-302
- Type: Slimline Single Magnet, holding force up to 600lbs (272kg) per leaf
- Size: Magnet: L500 x W42 x D26, Armature Plate: L179 x W38 x D11
- Material/ finish: Brushed Aluminium

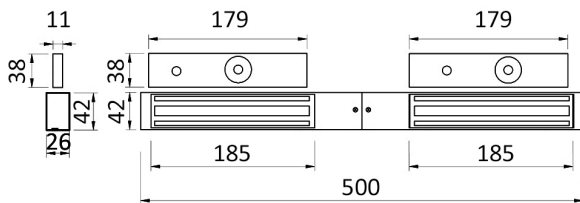

*For the purpose of continual product development, KCC reserves the right to change specifications without notice.
Please accept all dimensions as approximate. E&OE. © KCC Group 2020.*

www.thekccgroup.com