



**Description**

KCC Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch



**Technical Features**

Cylinder Style	Euro Profile
Operation by Key and / or Cylinder Turn	Single Throw of Deadbolt with single rotation of Key. Key also withdraws latchbolt
Operation by Lever Handle / Thumbturn	Latchbolt withdrawn by lever handle from either side
Operation by Privacy Indicator	n/a
Positive Grip Follower Feature	Yes
Springing	Individual spring mechanism for both latch bolt & lever handle
Handing	Non handed with easily reversible latchbolt
Cylinder	Euro piercing to suit euro profile cylinder
Furniture	Suitable for Bolt Through Lever Handles & Escutcheons
Forend Style	Radius
Rebate Options	KL-1900A (13MM) KL-1900B (25MM)

**Dimensions**

Case Depth A (mm)	87
Case Backset B (mm)	55
Case Centres C (mm)	72
Case Height D (mm)	164
Other Dimensions (mm)	n/a
Follower Dimension (mm)	8
Forend Dimension (mm)	H235 x W24 x 3
Fixing Centres (mm)	38
Deadbolt Dimension (mm)	H35 x D22
Latchbolt Dimension (mm)	H32.5 x D12.5

**Finishes**

Forend Finish	Satin Stainless Steel
---------------	-----------------------

**Certification**

European Norm	hEN12209
Product Classification	③X⑤①①①F③B C②①
EC Certificate of Conformity No.	1121-CPD-AG0090
Certifire No.	CF5234
Declaration of Performance	KCC-010
Other Test Evidence	n/a

**BIM Assist™**

**CE**

**Certifire**

**BC(A)R Assist™\***

**Guarantee**

**5 Years**

Last Reviewed

25/09/2017

\* ROI Only

*For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2020.*

**Description**

KCC Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch





**Specification Text**

- 515 DOOR LOCKS
- Standard: To BS EN 12209.
  - Manufacturer: KCC Group
  - Product reference: KL-1901RAR
  - Type: Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch
  - Backset: 55mm
  - Material/ finish: [SPECIFY FINISH]
  - Keying: n/a

525 PERFORMANCE SPECIFICATION FOR DOOR LOCKS AND LATCHES

- Standard: To BS EN 12209.
- Minimum classification grades:
- Category of use: 3
- Durability: X
- Door mass and closing force: 5
- Suitability for use on fire/ smoke doors: 1
- Safety: 0.
- Corrosion resistance and temperature: F
- Security and drill resistance: 3
- Field of door application: B
- Type of key operation and locking: C
- Type of spindle operation: 2
- Key identification requirement: 0
- Backset: 55mm
- Material/ finish: [SPECIFY FINISH]
- Keying: n/a

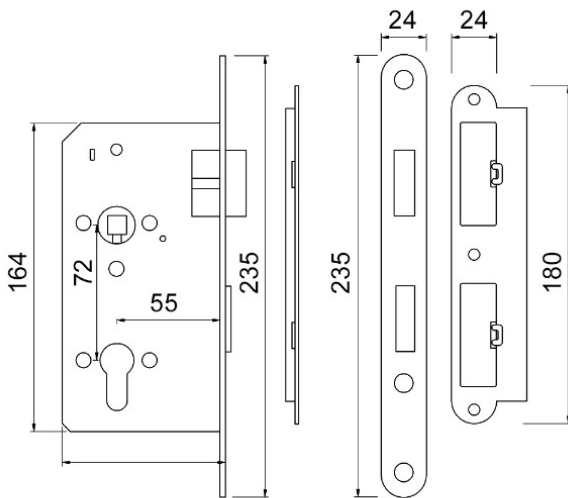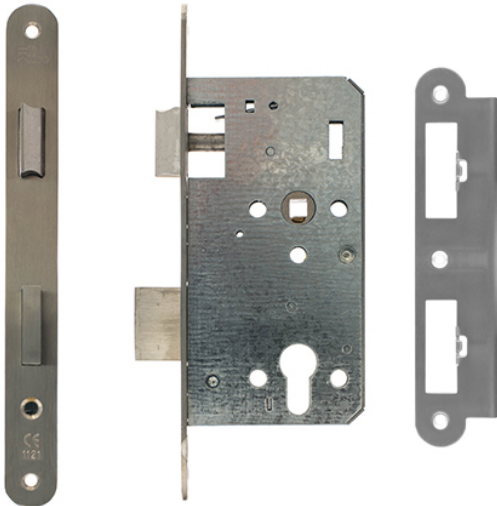

*For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2020.*